5V input double-cell series lithium battery boost charging chip

FEATURES

- The input operating voltage range is 4.5V~6V and the VIN withstand voltage is 20V.
- Boost Charge Efficiency: 95%.
- The maximum support is 18W power.
- Rechargeable battery voltage: 2 strings 8.4V.
- Charge Voltage Accuracy ±1%.
- Trickle/CC/CV charging
- Adjustable external resistance for constant-current charging.
- Constant current charging accuracy ±10%.
- Input adaptive charging at 4.5V, automatically adjust input current, and adapt to adapter load
- Support charging NTC temperature protection
- Battery backfill protection, quiescent power consumption 0uA.
- 750KHz switching frequency.
- LED charging display.
- ESD 4KV.
- Package: ESOP8

APPLICATIONS

Dual-cell Li-Battery/Li-ion battery charging

DESCRIPTION

The BC915_F is a boost charge management IC that supports dual-cell series Li-ion/Li-ion batteries .

BC915_F integrated power MOS: synchronous switching architecture, minimal peripherals, smaller solution size and lower BOM cost

BC915_F's step-up switching charging converter works at 750KHz; 5V input, 8V/1A output conversion efficiency 95%.

The BC915 has an input voltage limiting function, which can intelligently adjust the charging current and adapt to the load capacity of the adapter.

BC915_F supports external resistors to adjust the charging current.

The BC915_F has integrated NTC protection with NTC resistors.

PACKAGE AND APPLICATION

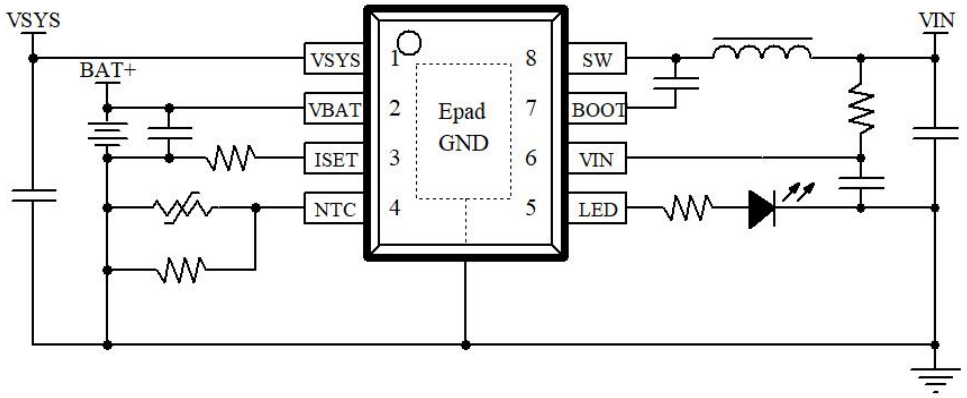

BC915_F ESOP8 PACKAGE

5V input double-cell series lithium battery boost charging chip

ORDING INFORMATION

Orderable Part Number	Package Type	Package Qty	Op Temp(°C)
BC915_F	ESOP8	3000	-40~85
BC915_F(customize)	DFN3*3_10	3000	-40~85

MARK INFORMATION



ABSOLUTE MAXIMUM RATINGS (1)

Over recommended operating free-air temperature range (unless otherwise noted)

Parameter	value	symbol	unit
Input voltage range	V_{IN}	-0.3~18	V
Battery voltage range	VBAT	-0.3~20	V
Junction temperature range	T_J	-40 ~ 150	℃
Storage temperature range	T_{stg}	-60 ~ 150	℃
Human Body Model (HBM)	ESD	4K	V

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

THERMAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

THERMAL METRIC			UNIT
Thermal resistance（ESOP8）	θ_{JA}	45	°C/W
Thermal resistance（DFN3*3）	θ_{JA}	65	°C/W

(1) The package thermal impedance is calculated in accordance with JESD 51-7.

5V input double-cell series lithium battery boost charging chip

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN	Typical	MAX	UNIT
Input voltage	V_{IN}	4.5	5	6	V

*Beyond these operating conditions, the operating characteristics of the device cannot be guaranteed.

PINOUT

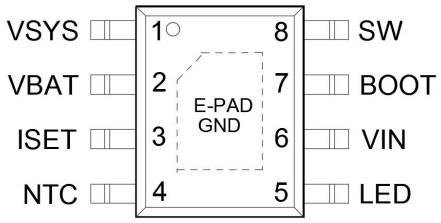

ESOP8

Package	Name	Function
ESOP8		
1	VSYS	Output voltage terminal, external 22uF capacitor
2	VBAT	Battery end
3	ISET	Charging current setting terminal, external resistor
4	NTC	Battery temperature detection, pull up or down, terminate charging, can be reused as a balancing control terminal, once the external equalization chip detects that the battery voltage deviation is large, it can be terminated by NTC, or start charging.
5	LED	LED display end
6	VIN	Charging input
7	BOOT	Bootstrap end, Bootstrap circuit pins
8	SW	Switching end · DC/DC switch nodes, link inductors
EPAD	GND	systematically and powerfully

(1) G = Ground, I = Input, O = Output, P = Power

5V input double-cell series lithium battery boost charging chip

ELECTRICAL CHARACTERISTICS

Conditions are -40°C ≤ (T_J=T_A) ≤ 125°C and 4.5 V ≤ V_{IN} ≤ 5.5 V unless otherwise noted. Typical value is at 25°C. All voltages are with respect to GND unless otherwise noted. Unless otherwise specified， TA=25℃，L=2.2uH，VIN=5V ，VOUT=7.4V

Parameter	symbol	Test conditions	MIN	Typical	MAX	UNIT
Input voltage	V_{IN}		4.5	5	6	V
Input undervoltage	V_{IN_UVLO}			4.3		V
	Hysteresis			100		mV
Input overvoltage	V_{IN_OVP}			5.8		V
	Hysteresis			0.2		V
Enter quiescent current	I_Q	VIN=5V · VBAT=10uF	1	3	5	mA
Battery backflush current		VIN=0V · VBAT=6-8.4V		0		uA
Switching frequency				750		KHZ
Trickle charge current	Itrick	VBAT≤6V		120		mA
	Itrick	VBAT≤2V		60		mA
Trickle-current to constant-current charging threshold	V_{TRKL}	VBAT rising		6		V
	V_{TRKL_HYS}	VBAT falling		5.8		V
Short-circuit current				130		mA
Short-to-trickle threshold				2		V
Hysteresis				1.6		V
Constant current		IBAT(RISET=2.5K)		1.2		A
Constant current charging current accuracy				±10		%
Fill up the voltage	VBAT		8.316	8.4	8.484	V
Accuracy of full voltage				±1		%
Charge cut-off current		IBAT=1.2A CC 10%		120		mA
Charge cut-off detection time	Tterm			4		mS
Recharge threshold	$VBAT_{rechg}$			8.05		V
Temperature loop threshold				120		℃
The chip is overheated		OTP		130		℃
		Hysteresis		10		℃

5V input double-cell series lithium battery boost charging chip

FUNCTIONAL BLOCK DIAGRAM

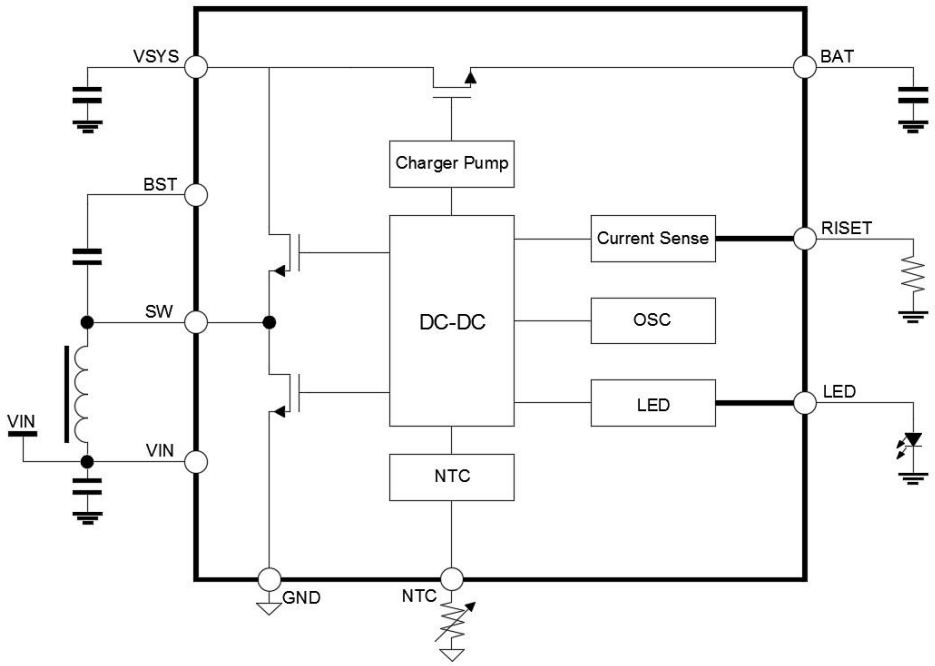

LED DISPLAY MODE

Mode 1: Monochrome light

	Charge	Fully charged	FAULT
LED1	Solid on	extinguish	flash1Hz

CHARGE CURRENT SETTING

Charge current size setting：R= 3/ICC Unit R:KΩ ICC:A

charge NTC

BC915_F supports NTC protection function, which can be used with NTC resistance to detect battery temperature; The BC915_F emits 20uA through the NTC pin, then detects the voltage generated by the current on the NTC resistor to determine the temperature, and turns off the charging when the detected temperature exceeds the set temperature. The BC915_F detects that the NTC pin voltage is at 0.45V, indicating that the battery temperature is too high and the charging stops. The NTC pin voltage is detected to rise to greater than 1.84V, indicating that the battery temperature is too low and charging is stopped.

If the NTC function is not required, connect the NTC pin to a 51K resistor to ground.

Example： RNTC=100K Thermistor(B=4100)， R4=120K， Corresponding temperature and NTC pin voltage

Temperature(℃)	RNTC Resistance value	R2//RNTC Resistance	NTC Pin voltage
0	246.7K	80.7K	1.85V
55	28.4K	22.7K	0.45V

5V input double-cell series lithium battery boost charging chip

SCHEMATIC DIAGRAM OF A TYPICAL APPLICATION

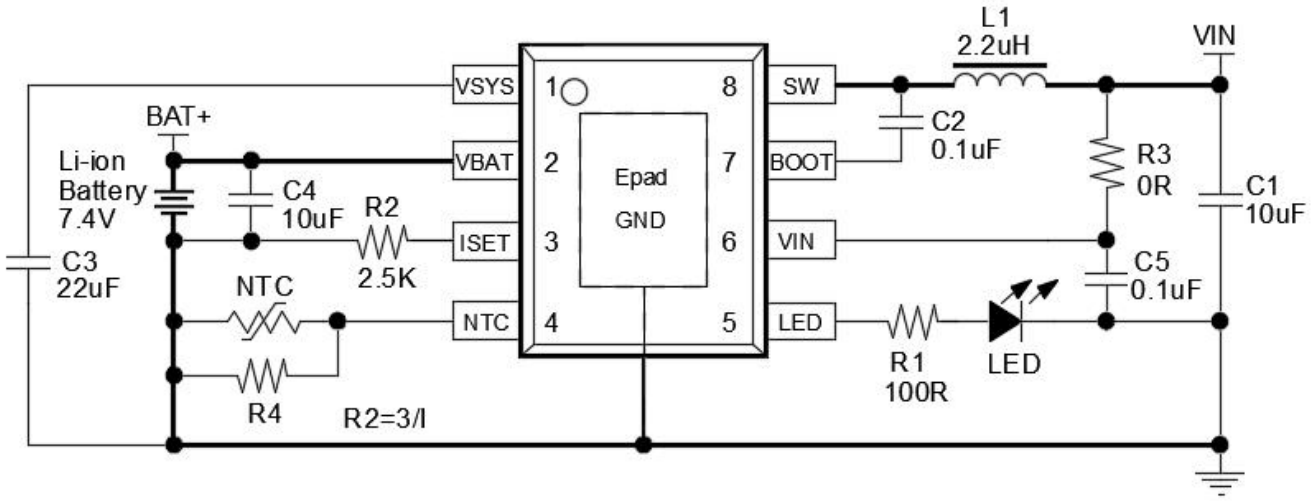

BC915_F Application diagram 1.2A charging current

BOM

serial number	The name of the component	Model & Specification	unit	Dosage	location	remark
1	IC	BC915_F	PCS	1	U1	
2	inductance	0630 One-piece molding	PCS	1	L1	Saturation Isat, temperature rise current Idc is greater than 5A, DCR is less than 20 mOhm, and inductance is 2.2uH @750KHz
3	SMD capacitors	0805 10uF 25V 10%	PCS	2	C1、C4	If the withstand voltage value is greater than 16V, a chip ceramic capacitor is required
4	SMD capacitors	0603 1nF 50V 10%	PCS	1	C2	EMC selection
5	SMD capacitors	0805 22uF 25V 10 %	PCS	1	C3	If the withstand voltage value is greater than 16V, a chip ceramic capacitor is required
6	SMD capacitors	0603 0.1uF 25V 10%	PCS	1	C5	resistor in parallel
7	SMD resistors	0603 5.1K 5%	PCS	1	R1	Used to adjust LED brightness
8	SMD resistors	0603 2.5K 1%	PCS	1		Adjust the charging current to 1.2A
9	SMD resistors	0603 0R 5%	PCS	1	R3	Input RC filtering
10	SMD resistors	0603 120K 1%	PCS	1	R4	Adjust the temperature protection range
11	SMD resistors	0603 4.7R 5%	PCS	1	R5	EMC selection
12	SMD LEDs	0603	PCS	1	LED	LED indicator with a maximum drive capacity of 5mA
13	NTC resistor	NTC 电阻	PCS	1	NTC	Select according to the design temperature; When not in use, connect a 51K resistor to ground

5V input double-cell series lithium battery boost charging chip

PACKAGE INFORMATION

DFN3*3_10

尺寸 / 标注	最小(mm)	标准(mm)	最大(mm)	尺寸 / 标注	最小(mm)	标准(mm)	最大(mm)
A	0.70	0.75	0.80	E	2.90	3.00	3.10
A1	-	-	0.05	D2	1.60	1.70	1.80
A3		0.203 REF		E2	2.30	2.40	2.50
b	0.18	0.23	0.28	e		0.50 TYP	
D	2.90	3.00	3.10	L	0.35	0.40	0.45

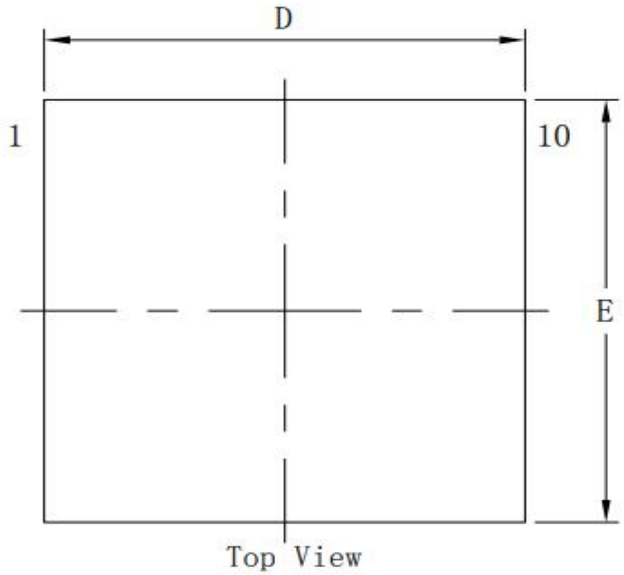

Top View

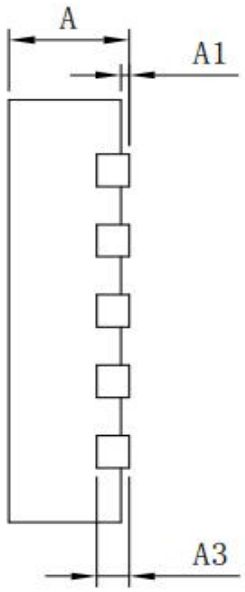

Side View

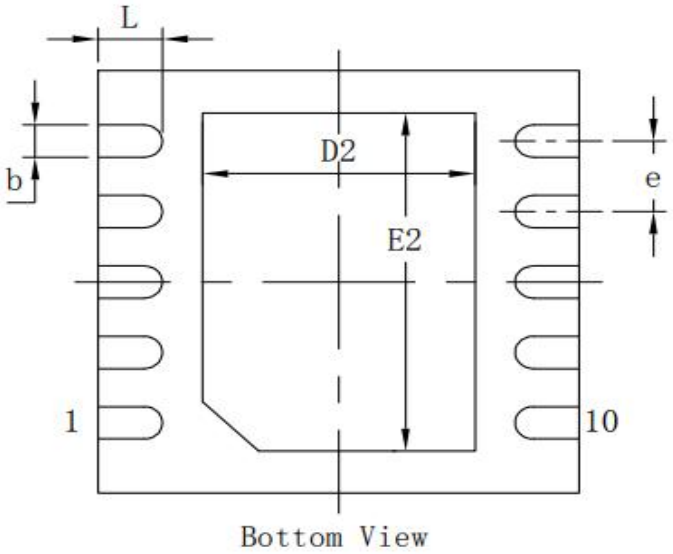

Bottom View

5V input double-cell series lithium battery boost charging chip

ESOP8

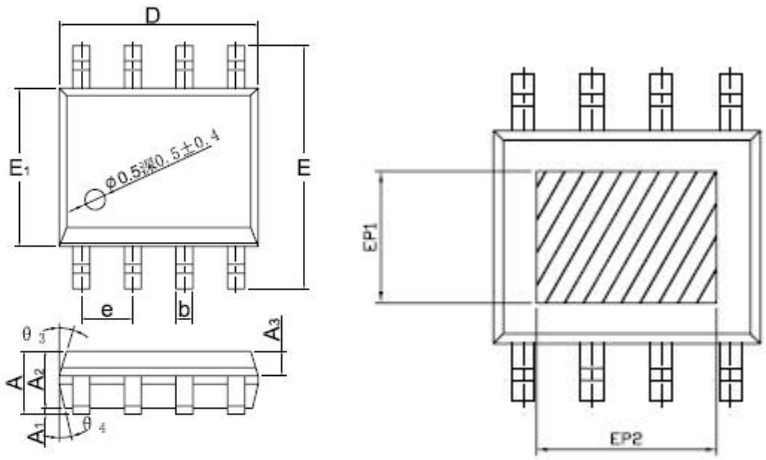

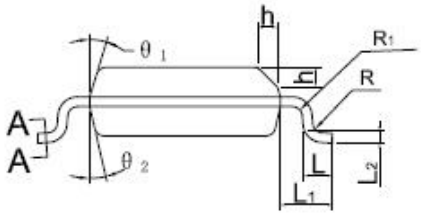



SECTIONA-A
6:1

DIMENSIONS IN MUILLIMETERS

SYMBOL	MIN	NOM	MAX
A	1.35	1.55	1.75
A_1	0.00	——	0.10
A_2	1.25	1.40	1.65
A_3	0.50	0.60	0.70
b	0.39	——	0.49
b_1	0.28	——	0.48
c	0.10	——	0.25
c_1	0.10	——	0.23
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E_1	3.80	3.90	4.00
e	1.27BSC		
L	0.45	——	1.00
L_1	1.04REF		
L_2	0.25BSC		
R	0.07	—	—
R_1	0.07	—	—
h	0.3	0.4	0.5
	0°	—	8°
θ_1	11°	17°	19°
θ_2	11°	13°	15°
θ_3	15°	17°	19°
θ_4	11°	13°	15°
EP1	2.40	—	—
EP2	3.30	—	—

Responsibility and Copyright Declaration

Shenzhen Semihigh Technology Co., Ltd. has the right to make corrections, modifications, enhancements, improvements or other changes to the products and services provided. Customers should obtain the latest relevant information and verify whether this information is complete and up-to-date before placing an order. All products are sold in accordance with the sales terms and conditions provided during order confirmation.

Shenzhen Semihigh Technology Co., Ltd. assumes no obligation for application assistance or customer product design. Customers are solely responsible for their use of Shenzhen Semihigh's products and applications. To minimize risks associated with customer products and applications, customers should provide sufficient design and operational safety verification.

The customer acknowledges and agrees that although any application related information or support may still be provided by Semihigh, they will be solely responsible for meeting all legal, regulatory, and safety requirements related to their products and the use of Semihigh products in their applications. The customer declares and agrees that they possess all necessary professional skills and knowledge to develop and implement safety measures, foresee the dangerous consequences of faults, monitor faults and their consequences, reduce the probability of faults that may cause personal injury, and take appropriate remedial measures. The customer will fully compensate for any losses caused to Shenzhen Semihigh and its agents due to the use of any Shenzhen Semihigh products in such critical applications.

For the product manuals or data sheets of Shenzhen Semihigh, copying is only allowed without any tampering with the content and with relevant authorization, conditions, restrictions, and statements. Shenzhen Semihigh assumes no responsibility or obligation for such tampered documents. Copying third-party information may require additional restrictions.

Shenzhen Semihigh will update the content of this document from time to time. The actual parameters of the product may vary due to different models or other matters. This document does not serve as any express or implied warranty or authorization

When reselling Shenzhen Semihigh products, if there is a discrepancy or false content between the description of the product parameters and the parameters indicated by Shenzhen Semihigh, all express or implied authorizations related to Shenzhen Semihigh products will be lost, and this is an improper and fraudulent business behavior. Shenzhen Semihigh assumes no responsibility or obligation for any such false statements.

Revision history

Document revision history

Data	Version	Changes
26-May-2024	Ver0.1	First release
14- August-2024	Ver1.0	Version 1.0
18- May-2025	Ver1.4	The charging current is fixed at 1.2A without an external resistor
24- Dec-2025	Ver1.5	The model number is changed to BC915_E