

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump

FEATURES

- Supply Voltage Range from 1 V to 5V
- Bigger than 100mA 6V output to drive Blue LED
- 24V_{PP} Output from a 3V Supply
- Input Signal 1Hz to 50kHz
- No Voltage Cross Output at Shutdown Mode
- Low Current Consumption
- Automatic Standby and Wake-up Control
- Available QFN3*3_16 package
- OTP feature

APPLICATIONS

- Health Care Systems
- Home Appliances
- Wrist Watches
-


- Handheld GPS devices
- PADs
- Security Devices
- Alarm Clocks

DESCRIPTION

The SD124 is a switching driver with multi-mode charge pump for piezo-sounder. It can drive outputs up to 24V_{pp} from 3V supply. For adjusting the piezoelectric sounder sound volume, the charge pump can operate in either of a 1x, 2x or 4x mode. Because SD124 has the shutdown function, it is suitable for the battery application. And more SD124 have a bigger than 100mA 6V output to drive blue LED.

SD124 includes built-in automatic shutdown and wake up that guarantees longer battery life. SD124 features thermal shutdown and output short protection circuits.

PACKAGE

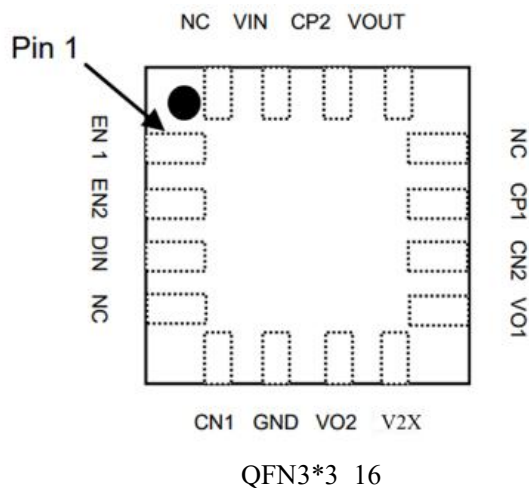


ORDING INFORMATION

Part Number	Package Type	Package Qty	Op Temp(°C)	Mark
SD124	QFN3*3_16	5000	-40~85	SD124 XXX

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump

PINOUT

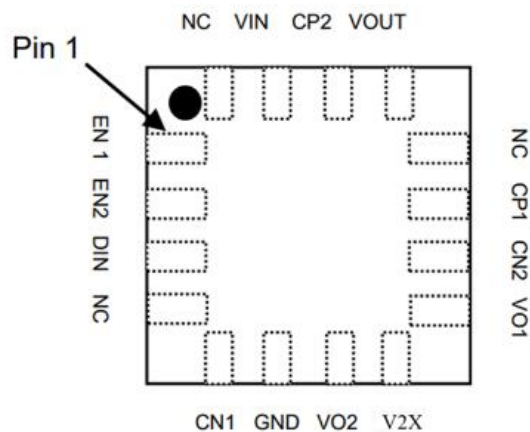

QFN3*3_16

PIN FUNCTIONS

QFN3*3_16	PIN		Function
1	EN1	I	Charge pump mode select 1
2	EN2	I	Charge pump mode select 2
3	DIN	I	Signal Input
4	NC	—	No Connection
5	CN1	I	Capacitor 1 Negative Terminal
6	GND	G	GND
7	VO2	O	Positive Output
8	V2X	O	Boost Vin
9	VO1	O	Negative Output
10	CN2	I	Capacitor 2 Negative Terminal
11	CP1	I	Capacitor 1 Positive Terminal
12	NC	—	No Connection
13	VOUT	O	Boost Output
14	CP2	I	Capacitor 2 Positive Terminal
15	VIN	P	Power supply
16	NC	—	No Connection

(1)G = Ground, I = Input, O = Output, P = Power

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump

ABSOLUTE MAXIMUM RATINGS^(Note 1)

(@ T_A = +25°C, unless otherwise specified.)

Symbol	Characteristics	Value	Unit
V _{IN}	Supply Voltage	-0.3 to 5.0	V
V _{OUT}	Output Voltage	-0.3 to 20	V
V _{EN1}	EN1 Voltage	-0.3 to V _{IN} +0.3	V
T _A	Operating Free-Air Temperature Range	-40 to +85	°C
T _J	Operating Junction Temperature Range	-40 to +150	°C
T _{STG}	Storage Temperature Range	-65 to +150	°C

Note: 1. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

(@ T_A = +25°C, unless otherwise specified.)

Symbol	Characteristics	Conditions	Min	Max	Unit
V _{IN}	Supply Voltage	1x Mode, 2x Mode, 4x Mode	1.3	5.0	V

ESD Susceptibility

HBM	Human Body Model	4	kV
MM	Machine Model	600	V
CDM	Charged Device Model	3	kV

THERMAL INFORMATION

Parameter	Symbol	Package	Maximum	Unit
Thermal Resistance (Junction to Ambient)	θ _{JA}	QFN3*3_16	35	°C/W
Thermal Resistance (Junction to Case)	θ _{JC}	QFN3*3_16	14	°C/W

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump

ELECTRICAL CHARACTERISTICS

(@T_A = +25°C, V_{IN} = 3.0V, C_{PIEZO} = 30nF, f_{DIN} = 3 kHz, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output Voltage	VOUT1	1x Mode	1.2	—	5	V
	VOUT2	2x Mode	5.2	—	10.4	V
	VOUT3	4x Mode (Note 2)	7.8	—	20	V
Operating Current 1	IDD11	1x Mode, C _{PIEZO} = No Load	—	150	—	μA
	IDD12	2x Mode, C _{PIEZO} = No Load	—	330	—	μA
	IDD13	4x Mode, C _{PIEZO} = No Load	—	600	—	μA
Operating Current 2	IDD21	1x Mode, Single-ended application	—	0.5	—	mA
	IDD22	2x Mode, Single-ended application	—	2.0	—	mA
	IDD23	4x Mode, Single-ended application	—	7.6	—	mA
Operating Current 3	IDD41	1x Mode, Differential application	—	0.3	—	mA
	IDD42	2x Mode, Differential application	—	1.1	—	mA
	IDD43	4x Mode, Differential application	—	3.8	—	mA
V2X	V2X	V _{in} =3V, Driving capability	100			mA
Shutdown Current	ISD	DIN = 0V	—	8	20	nA
Input Frequency	F _{in}	Rectangular pulse	—	3	—	kHz
Oscillating Frequency	F _{OSC}	Charge Pump Frequency	—	220	—	kHz
VOUT Start Delay Time	t _{ON1}	1x Mode, From DIN signal High to 90% V _{OUT} steady state	—	1	—	mS
	t _{ON2}	2x Mode, From DIN signal High to 90% V _{OUT} steady state	—	1	—	mS
	t _{ON3}	4 x Mode From DIN signal High to 90% V _{OUT} steady state	—	1	—	mS
Shutdown Delay Time	t _{OFF}	DIN = H- > L	—	40	—	ms
Output Short-Circuit Current	ISC	—	—	125	—	mA
Control Terminal Voltage H	VIH	EN1, EN2, DIN pins	0.5*VIN	—	VIN	V
Control Terminal Voltage L	VIL	EN1, EN2, DIN pins	0	—	0.2*VIN	V
Control Terminal Current 1	IIH1	DIN = 3V	—	1.3	—	μA
Control Terminal Current 2	IIH2	V _{EN1} = 3V, DIN = 3V	—	1.3	—	μA
Control Terminal Current 3	IIH3	V _{EN1} = 3V, DIN = 0V	—	—	1	μA


Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump

CHARGE PUMP MODE SETTING

DIN	EN1	EN2	MODE
0	--	--	Shutdown Mode
1	0	1	1x Mode
1	1	0	2x Mode
1	1	1	4x Mode


Notes: When DIN is triggered, EN1 and EN2 are prohibited from square-wave input or open-circuit state.

TIMING CHART1

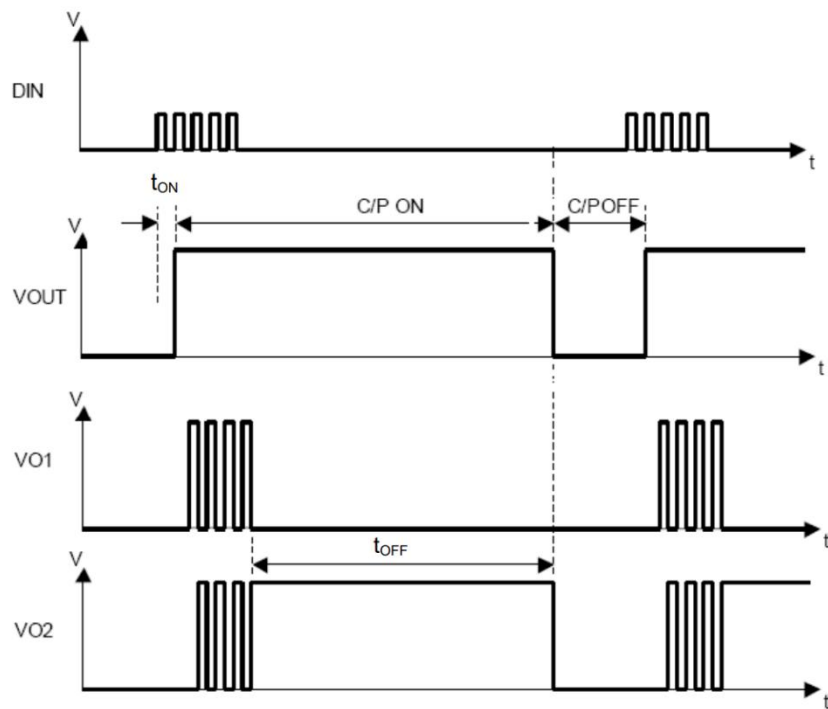

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump


APPLICATION CIRCUIT1

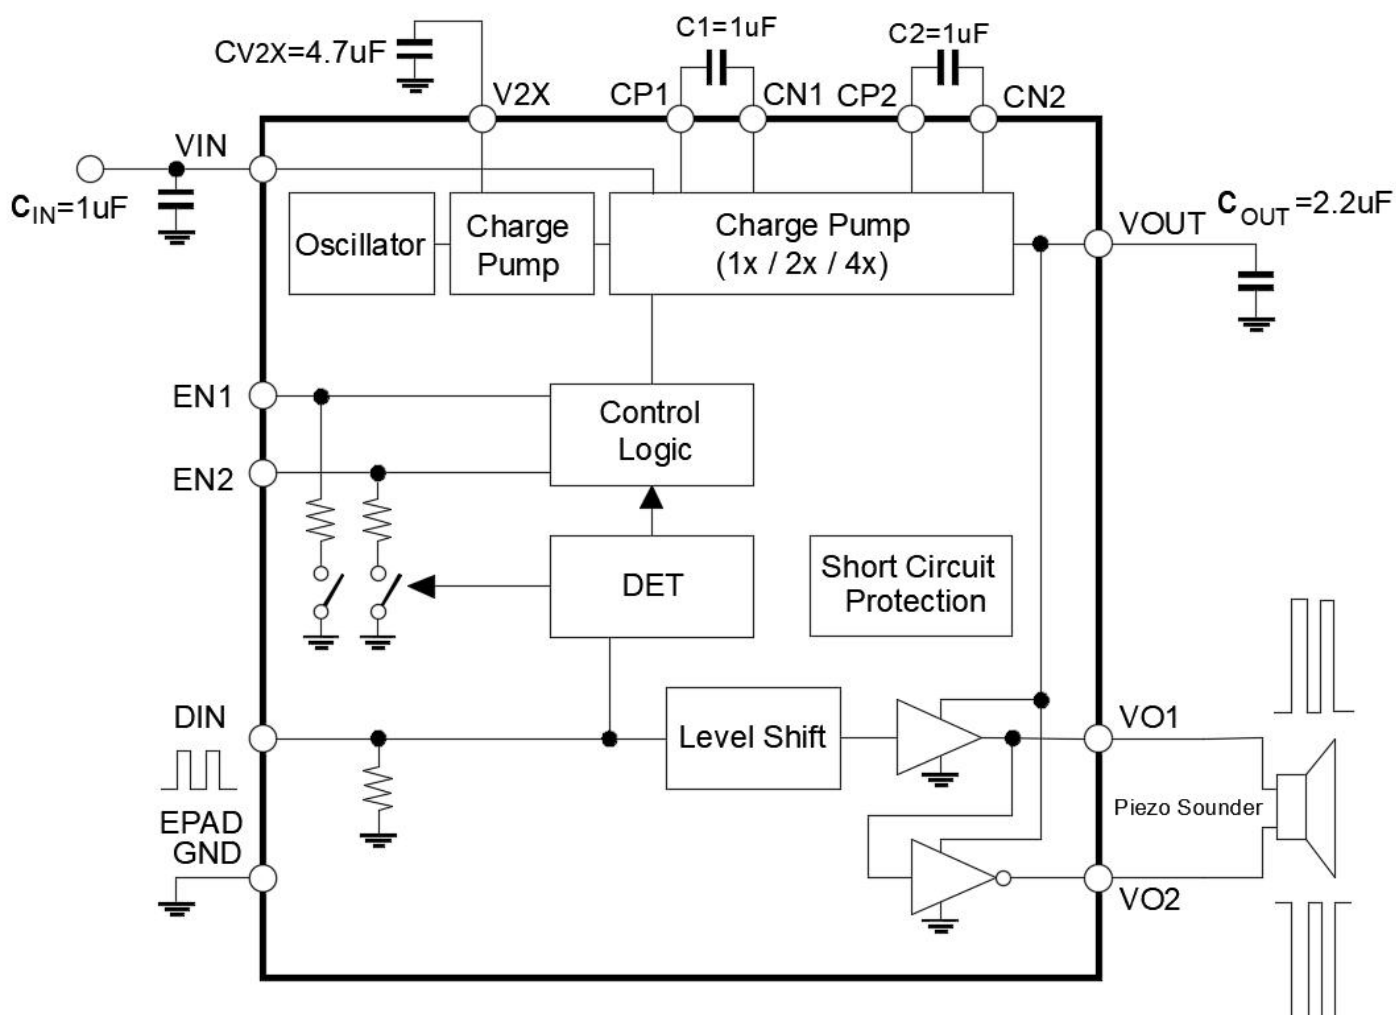

Application 1


Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump

TIMING CHART2

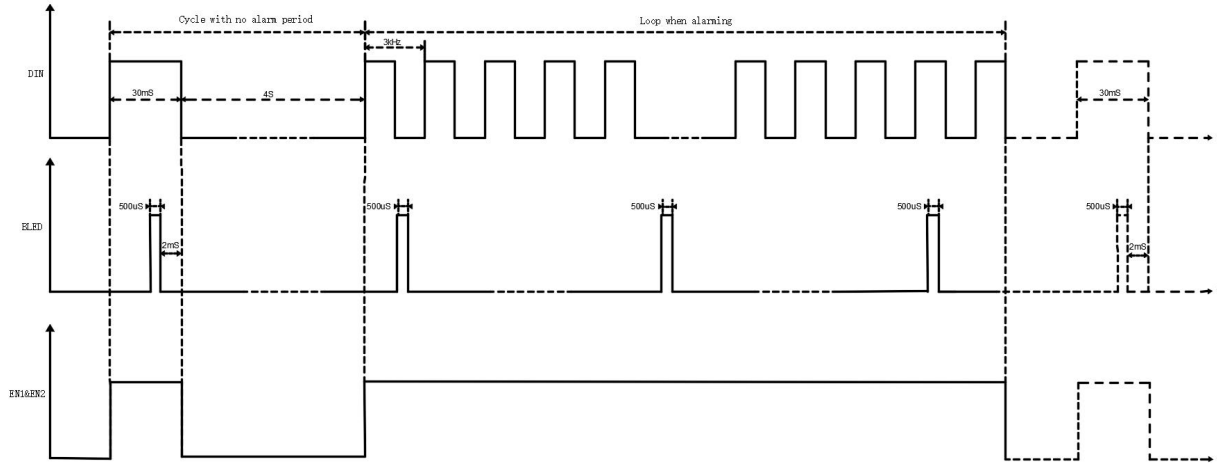

Smoke sensor Application Timing Diagram


APPLICATION CIRCUIT2

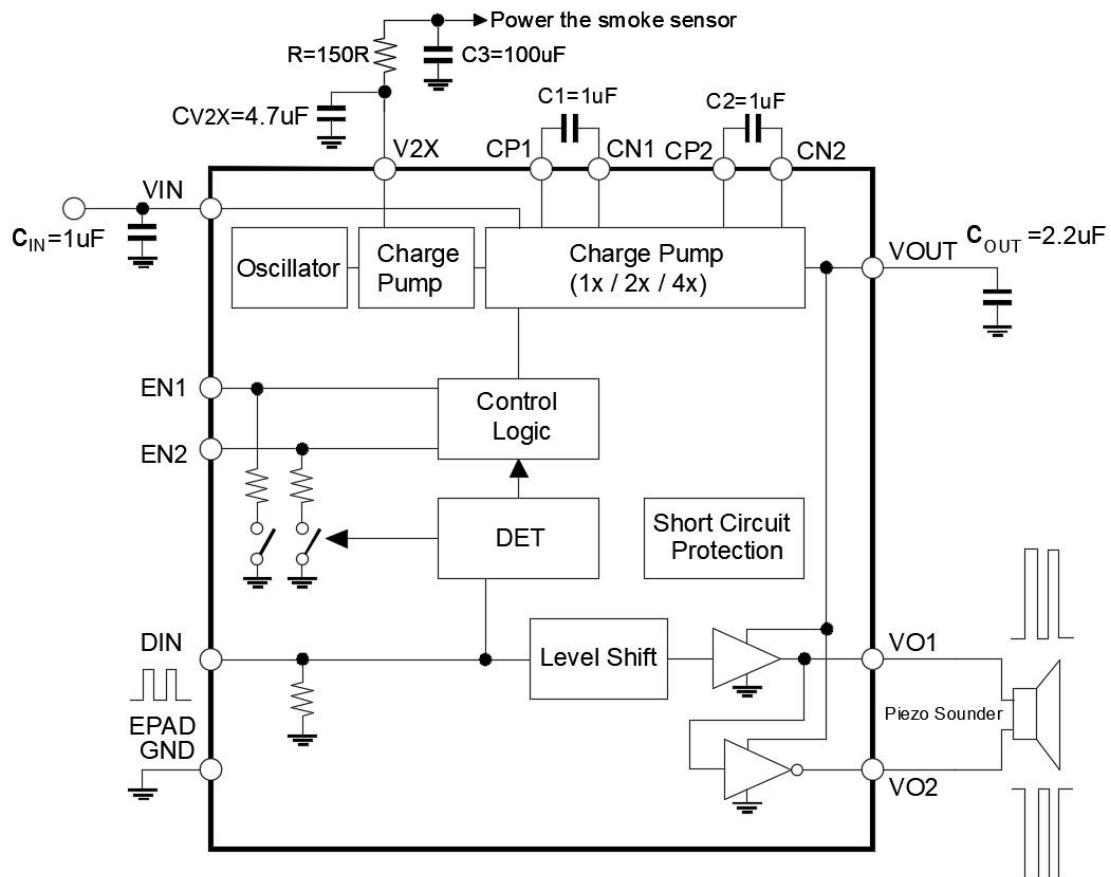

Smoke sensor Application

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump

PACKAGE INFORMATION(QFN3*3_16)

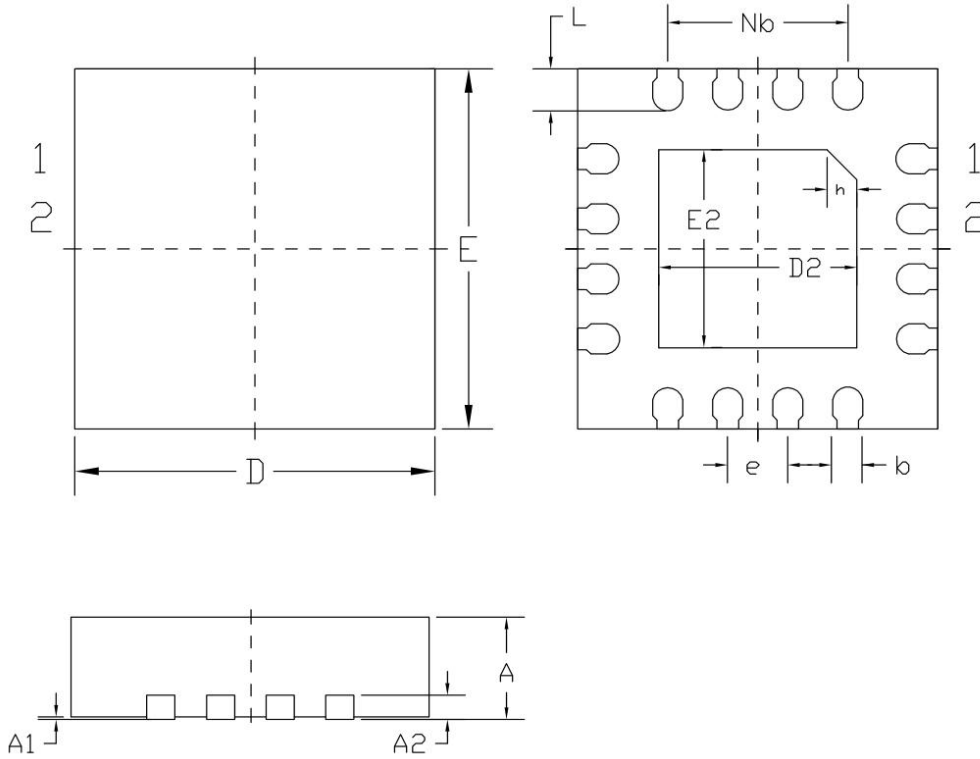

MILLIMETER			
SYMBOL	MIN	NOM	MAX
E	2.90	3.00	3.10
D	2.90	3.00	3.10
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A2	0.203REF		
Nb	1.50BSC		
e	0.50BSC		
L	0.30	0.35	0.40
b	0.20	0.25	0.30
h	0.15	0.25	0.35
D2	1.60	1.65	1.70
E2	1.60	1.65	1.70

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump**Responsibility and Copyright Declaration**

Shenzhen Semihigh Technology Co., Ltd. has the right to make corrections, modifications, enhancements, improvements or other changes to the products and services provided. Customers should obtain the latest relevant information and verify whether this information is complete and up-to-date before placing an order. All products are sold in accordance with the sales terms and conditions provided during order confirmation.

Shenzhen Semihigh Technology Co., Ltd. assumes no obligation for application assistance or customer product design. Customers are solely responsible for their use of Shenzhen Semihigh's products and applications. To minimize risks associated with customer products and applications, customers should provide sufficient design and operational safety verification.

The customer acknowledges and agrees that although any application related information or support may still be provided by Semihigh, they will be solely responsible for meeting all legal, regulatory, and safety requirements related to their products and the use of Semihigh products in their applications. The customer declares and agrees that they possess all necessary professional skills and knowledge to develop and implement safety measures, foresee the dangerous consequences of faults, monitor faults and their consequences, reduce the probability of faults that may cause personal injury, and take appropriate remedial measures. The customer will fully compensate for any losses caused to Shenzhen Semihigh and its agents due to the use of any Shenzhen Semihigh products in such critical applications.

For the product manuals or data sheets of Shenzhen Semihigh, copying is only allowed without any tampering with the content and with relevant authorization, conditions, restrictions, and statements. Shenzhen Semihigh assumes no responsibility or obligation for such tampered documents. Copying third-party information may require additional restrictions.

Shenzhen Semihigh will update the content of this document from time to time. The actual parameters of the product may vary due to different models or other matters. This document does not serve as any express or implied warranty or authorization

When reselling Shenzhen Semihigh products, if there is a discrepancy or false content between the description of the product parameters and the parameters indicated by Shenzhen Semihigh, all express or implied authorizations related to Shenzhen Semihigh products will be lost, and this is an improper and fraudulent business behavior. Shenzhen Semihigh assumes no responsibility or obligation for any such false statements.

Blue LED Driver and Piezo-sounder Driver with Multi-mode charge pump**REVISION HISTORY****Document revision history**

Data	Version	Changes
21-May-2026	Ver1.0	First issue Spec